


M43610


BRIDA 6.000 LIBRAS ISO /SAE CÓDIGO 62 - SAE J516 / ISO 12151-3



REF.	DIÁMETROS DE MANGUERA			ROSCAS	DIMENSIONES		
	DN	Pulgadas	Tamaño		T	B	A
M43610-10-12	16	5/8"	- 10	3/4"	16,0	64,0	41,4
M43610-10-16	16	5/8"	- 10	1"	20,0	81,5	47,7
M43610-12-12	19	3/4"	- 12	3/4"	16,0	71,4	41,4
M43610-12-16	19	3/4"	- 12	1"	20,0	83,4	47,7
M43610-16-12	25	1"	- 16	3/4"	16,0	80,3	41,4
M43610-16-16	25	1"	- 16	1"	20,0	84,7	47,7
M43610-16-20	25	1"	- 16	1.1/4"	26,0	89,0	54,2
M43610-20-16	31	1.1/4"	- 20	1"	20,0	87,2	47,7
M43610-20-20	31	1.1/4"	- 20	1.1/4"	26,0	91,1	54,2
M43610-20-24	31	1.1/4"	- 20	1.1/2"	32,0	97,2	63,7
M43610-24-20	38	1.1/2"	- 24	1.1/4"	26,0	101,2	54,2
M43610-24-24	38	1.1/2"	- 24	1.1/2"	32,0	97,7	63,7
M43610-24-32	38	1.1/2"	- 24	2"	42,0	112,8	79,6
M43610-32-24	51	2"	- 32	1.1/2"	32,0	117,0	63,7
M43610-32-32	51	2"	- 32	2"	42,0	112,8	79,6

M43690

BRIDA 6.000 LIBRAS CODO 90° ISO /SAE CÓDIGO 62 - SAE J516 / ISO 12151-3

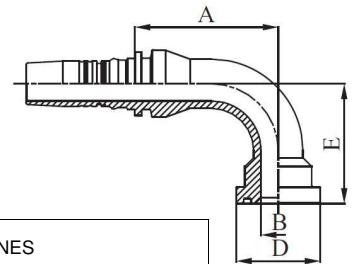

REF.	DIÁMETROS DE MANGUERA			ROSCAS	DIMENSIONES			
	DN	inch	Size		B	A	D	E
M43690-10-12	16,00	5/8"	- 10	3/4"	16,00	57,50	41,40	60,50
M43690-12-12	19,00	3/4"	- 12	3/4"	16,00	72,40	41,40	59,00
M43690-12-16	19,00	3/4"	- 12	1"	20,00	72,40	47,70	65,00
M43690-16-12	25,00	1"	- 16	3/4"	16,00	81,30	41,40	62,00
M43690-16-16	25,00	1"	- 16	1"	20,00	81,10	47,70	68,00
M43690-16-20	25,00	1"	- 16	1.1/4"	26,00	78,60	54,20	76,00
M43690-20-16	31,00	1.1/4"	- 20	1"	20,00	98,50	47,70	79,00
M43690-20-20	31,00	1.1/4"	- 20	1.1/4"	26,00	98,50	54,20	81,00
M43690-20-24	31,00	1.1/4"	- 20	1.1/2"	32,00	98,50	63,70	91,50
M43690-24-20	38,00	1.1/2"	- 24	1.1/4"	26,00	111,20	54,20	91,00
M43690-24-24	38,00	1.1/2"	- 24	1.1/2"	32,00	112,50	63,70	94,50
M43690-24-32	38,00	1.1/2"	- 24	2"	42,00	112,50	79,60	110,50
M43690-32-32	51,00	2"	- 32	2"	42,00	140,70	79,60	132,00