


M20592

HEMBRA BSP CODO 90° ASIENTO 60° —BS5200 / ISO12151-6 (TUERCA CON PASADOR)

M20593


HEMBRA BSP CODO 90° ASIENTO 60° —BS5200 / ISO12151-6 (TUERCA LIBRE)

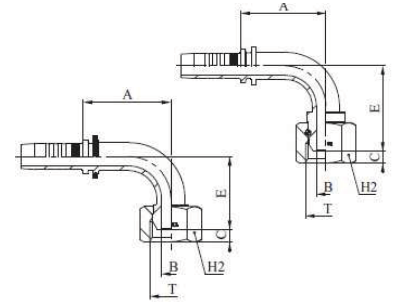

REF.	DIÁMETROS DE MANGUERA			ROSCAS T	DIMENSIONES				
	DN	Pulgadas	Tamaño		B	A	C	E	H2
M20592-03-02	5	3/16"	- 03	1/8" - 28	3,1	21,5	4,4	26,0	14
M20593-03-04	5	3/16"	- 03	1/4" - 19	4,0	29,0	5,4	29,0	19
M20592-04-02	6	1/4"	- 04	1/8" - 28	3,1	28,5	4,4	27,0	14
M20593-04-04	6	1/4"	- 04	1/4" - 19	4,0	29,5	5,4	29,0	19
M20593-04-06	6	1/4"	- 04	3/8" - 19	7,0	29,5	6,0	31,0	22
M20592-05-04	8	5/16"	- 05	1/4" - 19	4,1	26,5	5,4	29,5	19
M20593-05-06	8	5/16"	- 05	3/8" - 19	7,0	32,0	6,0	27,5	22
M20593-05-08	8	5/16"	- 05	1/2" - 14	9,3	36,5	6,5	32,0	27
M20592-06-04	10	3/8"	- 06	1/4" - 19	4,0	27,0	4,2	29,5	19
M20593-06-06	10	3/8"	- 06	3/8" - 19	7,0	36,5	6,0	31,5	22
M20593-06-08	10	3/8"	- 06	1/2" - 14	9,3	36,5	6,5	32,0	27
M20592-08-06	12	1/2"	- 08	3/8" - 19	7,0	45,0	6,0	41,0	22
M20593-08-08	12	1/2"	- 08	1/2" - 14	9,3	45,0	6,5	36,5	27
M20592-08-10	12	1/2"	- 08	5/8" - 14	12,1	44,0	10,2	44,0	28
M20592-08-12	12	1/2"	- 08	3/4" - 14	15,0	44,0	9,0	45,5	32
M20592-10-08	16	5/8"	- 10	1/2" - 14	9,3	53,5	6,5	54,5	27
M20592-10-10	16	5/8"	- 10	5/8" - 14	12,5	53,5	10,2	53,5	28
M20592-10-12	16	5/8"	- 10	3/4" - 14	15,0	53,5	9,0	55,0	32
M20592-12-08	19	3/4"	- 12	1/2" - 14	9,3	45,5	6,5	44,0	27
M20592-12-12	19	3/4"	- 12	3/4" - 14	15,5	61,5	9,0	59,5	32
M20592-12-16	19	3/4"	- 12	1" - 11	19,8	61,5	10,5	62,0	38
M20592-16-12	25	1"	- 16	3/4" - 14	15,0	64,5	9,0	59,5	32
M20592-16-16	25	1"	- 16	1" - 11	19,8	79,5	10,5	76,0	38

M20892

HEMBRA BSP CON O'RING CODO 90° ASIENTO 60° —BS5200 / ISO12151-6 (TUERCA CON PASADOR)



REF.	DIÁMETROS DE MANGUERA			ROSCAS T	DIMENSIONES				
	DN	Pulgadas	Tamaño		B	A	C	E	H2
M20892-10-10	16	5/8"	- 10	5/8" - 14	12,5	53,0	9,7	55,0	30
M20892-12-12	19	3/4"	- 12	3/4" - 14	15,0	61,5	8,5	60,0	32
M20892-12-16	19	3/4"	- 12	1" - 11	19,8	61,5	10,5	62,0	38
M20892-16-12	25	1"	- 16	3/4" - 14	15,0	79,5	8,5	60,0	32
M20892-16-16	25	1"	- 16	1" - 11	19,8	79,5	10,6	76,0	38
M20892-16-20	25	1"	- 16	1.1/4" - 11	26,1	79,5	10,5	78,5	50
M20892-20-16	31	1.1/4"	- 20	1" - 11	19,8	79,5	10,5	76,0	38
M20892-20-20	31	1.1/4"	- 20	1.1/4" - 11	26,0	90,5	10,5	83,5	50
M20892-20-24	31	1.1/4"	- 20	1.1/2" - 11	32,1	90,5	12,5	84,5	60
M20892-24-20	38	1.1/2"	- 24	1.1/4" - 11	26,0	95,0	10,5	90,5	50
M20892-24-24	38	1.1/2"	- 24	1.1/2" - 11	32,0	108,0	12,5	98,5	60
M20892-32-32	51	2"	- 32	2" - 11	42,0	131,0	16,1	110,5	70